



Mudhafer Establishment

Muscat, Sultanate of Oman

Tel: +968 24 81 2970

E-mail: info@mudest.com

Spring Driven Fuel Reels

Series F7000 / F80000 / FD80000 / FD9000

Reelcraft's fuel delivery reels, equipped with Viton seals, incorporate metal forms to insure the greatest possible strength and are ideal for mobile and permanent-mount applications. These rugged, corrosion-resistant reels are suitable for a variety of fuel applications including E85.

Model	Hose I.D.	Hose Length	Max PSI	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
*Models equipped with fuel grade hose. UL330 and ULC approved hose. 250 PSI minimum burst.							
F7925 OLP	3/4"	25'	50*	3/4"	3/4"	19 x 6 1/8 x 20 1/4	47
F83050 OLP	3/4"	50'	50*	3/4"	3/4"	24 x 10 1/8 x 25 3/8	89
FD83075 OLP	3/4"	75'	50*	3/4"	3/4"	24 x 14 1/4 x 25 3/8	115
FD84050 OLP	1"	50'	50*	1"	1"	24 x 15 1/4 x 25 3/8	115
FD9350 OLP	3/4"	50'	50*	3/4"	3/4"	24 1/8 x 16 3/4 x 26 3/8	140
FD9450 OLP	1"	50'	50*	1"	1"	24 1/8 x 16 3/4 x 26 3/8	157



Series FD80000
FD83075 OLP

Spring Driven Static Discharge Reels

Series G 3000

Reelcraft's static discharge reels are used to ground equipment operating in hazardous atmospheres, such as fuel trucks or carts transferring flammable materials. When properly clamped to ground, the static discharge reel dissipates static electrical buildup, reducing the chances of sparking and the potential for explosion.

Model	Cable Extended Y	Clamp Rating	Cable Notes	Dimensions L x W x H (in.)	Weight (lbs)
G 3050	50'	N/A	100 AMP Single 7 x7 stranded steel*	8.62 x 3.35 x 8.81	12
G 3050 Y	50'	2 @ 15'	35' plus dual 15' for 'Y'* Total extension 50'	8.62 x 3.35 x 8.81	12
G 3050 N	50'	N/A	100 AMP Nylon covered cable**	8.62 x 3.35 x 8.81	12
GA3100 N	100'	N/A	100 AMP Hi-vis orange nylon covered cable**	9.25 x 4.31 x 9.75	16



Series G 3000
G 3050

Mobile Base Spring Driven Reels

Series 9000

Reelcraft's Series 9000 mobile base reels are ideal for portable service trucks, permanent service or plant work areas. A durable baked-on powder coat finish produces a rugged corrosion resistant product suitable for a wide variety of heavy duty applications.

Model	Hose I.D.	Hose Length	Max PSI	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
D9299 OLPBW	1/2"	100'	300	1/2"	1/2"	26 1/4 x 12 x 26 1/4	127
D9350 OLPBW	3/4"	50'	250	3/4"	3/4"	26 1/4 x 12 x 26 1/4	140
D9375 OLPBW	3/4"	75'	250	3/4"	3/4"	26 1/4 x 12 x 26 1/4	152
D9450 OLPBW	1"	50'	250	3/4"	1"	26 1/4 x 12 x 26 1/4	157



Series 9000
D9450 OLPBW



Mudhafer Establishment

Muscat, Sultanate of Oman

Tel: +968 24 81 2970

E-mail: info@mudest.com

Heavy Duty Industrial Spring Driven Reels

Series 7000

Reelcraft's Series 7000 is very robust and ideal for the most demanding applications. The reel's base and guide arms are formed from high-grade steel and are engineered with structural forms and gussets to yield the greatest amount of strength.

Model	Hose I.D.	Hose Length	Max PSI	(M)NPTF Hose Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
Low Pressure Air/Water Reels Maximum temperature 150° F. Furnished standard with PVC hose.							
7650 OLP	3/8"	50'	300	1/4"	1/2"	19 x 6 1/8 x 20 1/4	43
7670 OLP	3/8"	70'	300	1/4"	1/2"	19 x 6 1/8 x 20 1/4	47
7850 OLP	1/2"	50'	300	3/8"	1/2"	19 x 6 1/8 x 20 1/4	47
7925 OLP	3/4"	25'	250	3/4"	3/4"	19 x 6 1/8 x 20 1/4	47
Medium Pressure Oil Reels Maximum temperature 210° F. Furnished standard with S.A.E. 100 R1T one wire braid hose.							
7850 OMP	1/2"	50'	3250	1/2"	1/2"	19 x 6 1/8 x 20 1/4	57
High Pressure Grease Reels Maximum temperature 210° F. Furnished standard with S.A.E. 100 R2T two wire braid hose.							
7650 OHP	3/8"	50'	4800	1/4"	1/2"	19 x 6 1/8 x 20 1/4	60



Series 7000
7850 OLP

Stainless Steel Hose Reels


Stainless Steel Series

Reelcraft's stainless steel hose reels will increase the life of expensive chemical fluid transfer and wash down hoses. Stainless steel hose reels include Viton® O-rings and are made from 304L grade of stainless steel. Hose not included on all models listed.

Model	Hose I.D.	Hose Length	Max PSI	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
5600 OLS	3/8"	35'	500	3/8"	13 3/4 x 6 x 14 1/2	22
7800 OLS	1/2"	50'	500	1/2"	19 x 6 1/8 x 20 1/4	41
82000 OLS	1/2"	100'	500	1/2"	24 x 10 1/8 x 25 3/8	81
D83000 OLS	3/4"	75'	500	3/4"	24 x 14 1/4 x 25 3/8	84
D9300 OLS	3/4"	75'	500	3/4"	26 1/4 x 16 3/4 x 26 3/8	116
D84000 OLS	1"	50'	500	1"	24 x 15 1/4 x 25 3/8	92
HS18000 M	1/2"	200'	3000	1/2"	20 x 18 1/4 x 19	36



Series 5000
5600 OLS

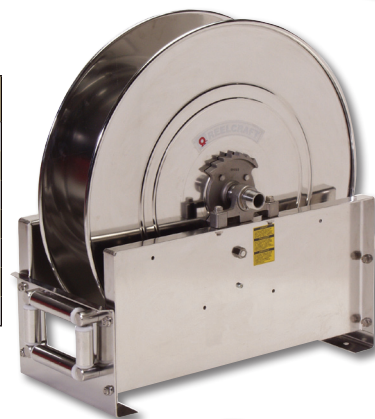

Series 9000
D9300 OLS

Heavy Duty Hand Crank Reels

Series 30000

Reelcraft's Series 30000 reels are designed for rugged, heavy duty applications requiring long lengths of hose and large storage capacity. A full flow swivel and heavy gauge steel frame, spool and drum ensure longest service life.

Model	Hose I.D.	Hose Capacity	Max PSI	(M)NPTF Reel Outlet	(F)NPTF Reel Inlet	Dimensions L x W x H (in.)	Weight (lbs)
CA32112 L	1/2"	200'	1000	1/2"	1/2"	25 x 17 3/4 x 20 1/4	46
CA33112 L	3/4"	100'	1000	3/4"	3/4"	25 x 17 3/4 x 20 1/4	46
CA33118 L	3/4"	175'	1000	3/4"	3/4"	31 x 17 3/4 x 20 1/4	51
CA37118 L	1"	100'	300	1"	1"	31 x 17 3/4 x 20 1/4	54
CA32112 M	1/2"	200'	3000	1/2"	1/2"	25 x 17 3/4 x 20 1/4	46



Series 30000
CA33112 L

www.mudest.com

